

## Performance of Fluidized Bed Biofilm Reactor for Nitrate Removal

S. P. Burghate<sup>1\*</sup>, Dr. N. W. Ingole<sup>2</sup>

<sup>1\*</sup>Department of Civil Engineering, Government Polytechnic, Amravati, INDIA

<sup>2</sup>Department of Civil Engineering, Prof. Ram Meghe Institute of Technology and Research, Badnera, INDIA

---

### Abstract

Nitrate is present in the majority of water resources, and has reached serious level in many parts of the world, which is responsible for environmental problems. Hence it is necessary to remove nitrate. Biological denitrification provides the most economical means for nitrate removal. This paper represents the performance of Fluidized Bed Biofilm Reactor (FBBR) using bone china fine granules as biofilm carrier media for biological denitrification.

In this experimental work, the maximum average nitrogen removal efficiency of 93.71% at HRT of 30 minutes and optimum efficiency of 88.13% at HRT of 10 minutes is observed. For nitrogen loading rates varying from 0.48 to 28.80 kg N m<sup>-3</sup> d<sup>-1</sup>, denitrification rates observed are 0.44 kg N m<sup>-3</sup> d<sup>-1</sup> to 17.26 kg N m<sup>-3</sup> d<sup>-1</sup>. Optimum nitrogen loading rate and denitrification rate observed are 10.08 kg N m<sup>-3</sup> d<sup>-1</sup> and 8.88 kg N m<sup>-3</sup> d<sup>-1</sup> respectively. The results justify the usefulness of FBBR for denitrification.

**Keywords:** Anoxic, Denitrification; Fluidized Bed Biofilm Reactor (FBBR); Methanol; Nitrate.

---

### I. INTRODUCTION

Nitrate has become one of the key environmental issues because of its implications on human and animal health. Nitrogen is a major constituent of the earth's atmosphere and occurs in many different gaseous forms such as elemental nitrogen, nitrate and ammonia. While nitrate is a common nitrogenous compound due to natural process of nitrogen cycle, anthropogenic sources have greatly increased the nitrate concentration, particularly in groundwater [7]. The excessive applications of fertilizers, intensive exploitation of farms and the significant contribution from industry have increased the nitrogen load discharged to receiving waterways [29, 40, 5]. Nitrate contamination of water resources is becoming a serious environmental problem worldwide [43, 21, 28, 6, 31]. A physico-chemical analysis study of groundwater in Sambhar lake city, Rajasthan, India was carried out and researchers have found nitrate concentration levels upto 1100 mg l<sup>-1</sup> [19]. After assessing the water quality of Upper Lake, Bhopal (India), which supplies drinking water to 16 lakh populations, found nitrate concentration as 150 – 720 mg l<sup>-1</sup>[30]. In a case study carried out for water quality of water sources of Yavatmal district, Maharashtra (India), found nitrate concentration in the range of 100 mg l<sup>-1</sup> to 500 mg l<sup>-1</sup>. Nitrate concentration is above the permissible level of 45 mg l<sup>-1</sup> in 11 states, covering 95 districts and 2 blocks of Delhi [20]. Similar high concentrations of nitrate found in an investigation of nitrate content in ground and surface waters in urban and rural areas [13]. Nitrate contamination of groundwater resources is becoming a problem in Europe as well as in the United States and Canada. In many areas the nitrate concentration in groundwater has reached serious levels exceeding the nominal limits of 10.0 mg l<sup>-1</sup> as NO<sub>3</sub><sup>-</sup>-N (nitrate nitrogen) set by the U.S. Environmental Protection Agency or 50 mg l<sup>-1</sup> as NO<sub>3</sub><sup>-</sup>(nitrate) set by the World Health Organization, the European Economic Community, and some former East European countries, e.g. Czechoslovakia. Concern over increase in nitrate concentrations is very legitimate due to potential ill effects on health. The toxicity of nitrates for humans is not clearly established. However, their consumption can cause infant methemoglobinemia (blue baby syndrome). Reduction of nitrates into nitrites in saliva may contribute to the formation of nitrosoamines, which are known carcinogens [33, 39, 14, 62, 64, 56]. Accumulation of various forms of nitrogen in surface and ground waters can lead to adverse effects including depletion of dissolved oxygen (DO) in receiving waters, eutrophication, ammonia toxicity to aquatic life, and public health problems related to the presence of nitrate in drinking water supplies [61, 17, 11, 46, 45]. Nitrate can also cause anemia, oral cancer, cancer of colon, vascular dementia and multiple sclerosis [40].

Till today, presence of nitrate in potable water had not been given serious attention in India. However with the new dimensions of nitrate concentrations such as stomach cancer and other health problems, there is a vital need to identify the areas of high nitrate waters and develop appropriate treatment. A survey of literature yielded an abundance of information on the technical treatment to remove nitrate from water including ion exchange, biological denitrification, chemical denitrification, catalytic denitrification, reverse osmosis and electro dialysis [49]. Three methods show some potential for full-scale application: ion exchange, reverse osmosis, and biological denitrification [33].

Nitrate from the contaminated water can be removed by ion exchange. Ion exchange is basically a physical/chemical process which requires periodic regeneration to restore its exchange capacity and process efficiency. It is known that periodic regeneration of exhausted resins with sodium chloride (NaCl) or sodium bicarbonate (NaHCO<sub>3</sub>) results in a spent regenerant or brine waste containing high concentrations of nitrate-N, NaCl and NaHCO<sub>3</sub> [65]. Ion exchange is limited by two problems. The first is that a resin of high selectivity for nitrates over ions that are commonly present in groundwater does not exist. The second problem involves providing an adequate resin regenerant such that regenerant disposal does not become a problem itself [33]. The problem of reverse osmosis is that the membranes used generally do not exhibit high selectivity for nitrates. The degree of salt rejection is directly related to the valency of the ions. That is why the reverse osmosis process results in better removal of multivalent ions. Reverse osmosis results in the removal of many ionic species and in a significant reduction in the mineral content of the water.

The most promising and versatile approach being studied is biological denitrification. This process has been used for years in wastewater treatment. Biological denitrification is highly selective for nitrate removal. The efficiency of the process is very high and can reach nearly 100%, which is not matched by any other methods available for nitrate reduction. The potential bacterial contamination of treated water is the main disadvantage. This risk is very legitimate and subsequent treatment and disinfection are required to meet current drinking water standards [33]. Biological denitrification can be carried out in either fixed film or suspended growth systems with the use of methanol or some equivalent carbon source. The FBBR is one of the methods, which comes under the category of fixed film type of system. It is the recent method and can be used for biological denitrification with great advantages.

The work presented in this paper is related to an experimental work carried out in the laboratory. A setup of FBBR was established in the laboratory to study biological denitrification. The biofilm carrier media used was sand which is easily available and economical. By considering the advantages of FBBR and sand media, this study is carried out. The FBBR was run for several days to observe denitrification of synthetic wastewater for various concentrations of NO<sub>3</sub><sup>-</sup>-N, which vary from 10 mg l<sup>-1</sup> to 100 mg l<sup>-1</sup>. The results showed, the FBBR has great potential for denitrification.


## II. BIOLOGICAL DENITRIFICATION

Biological nitrification and denitrification is one of the most economical processes of nitrogen removal from municipal wastewaters [27, 22, 47, 53]. Nitrate removal from wastewaters is commonly achieved by employing the bacterial process of denitrification, in which nitrate is reduced to innocuous nitrogen gas (N<sub>2</sub>). The process requires an electron donor to supply electrons (energy) to the bacteria [25, 59, 36, 23, 9, 60]. The condition suitable for denitrification – absence of oxygen but presence of nitrate, is commonly referred as anoxic. The biological denitrification process (dissimilation) involves the conversion of nitrate ions into nitrogen gas by facultative heterotrophic bacteria. Anoxic conditions and an energy source are required for this. Heterotrophic denitrifying bacteria require an organic carbon source for respiration and growth. Carbon source plays an important role in biological nitrogen and phosphorus removal during the wastewater treatment [63]. A wide variety of organic compounds have been used, such as methanol, ethanol, glucose, acetate, aspartate, or formic acid as well as different industrial wastes including molasses, whey, distillery spillage, and sulfite liquor. However, most of the published research regarding denitrification involves the use of methanol, ethanol, and acetic acid [33]. The usefulness of methanol in the denitrification process is determined first of all by economic considerations [15, 48]. Methanol is a very convenient carbon source for denitrification due to its high solubility in water, high biodegradability and known stoichiometry [2, 12]. It is the most appropriate choice because of its availability, low cost, favorable sludge production, low volatile organic compound (VOC) emissions potential and lack of nitrogen and phosphorus.


If methanol is used as a carbon source, the stoichiometric relationships describing bacterial energy reactions in two steps are written as equations 1 and 2 which give the overall (dissimilation) equation 3 [33, 65, 34] :



Nitrate assimilation is generally expressed by equation 4:



The cell formula C<sub>5</sub>H<sub>7</sub>NO<sub>2</sub> suggested by Hoover and Porgess (Metcalf & Eddy, 2003) was used. The “overall” (dissimilation + assimilation) process in nitrate-limiting conditions is described by McCarty’s equation 5 :



Extension of Equation 5 to take also nitrite and oxygen, which often keep company with nitrate in the feed, into account, gives to the empirical relation equation 6 weight basis [58].

$$M = 2.47(g \text{NO}_3^- - N) + 1.53(g \text{NO}_2^- - N) + 0.87(g \text{O}_2) \quad (6)$$

The data found in the literature significantly differ from those in the above. In spite of 2.47, the value of the coefficient in equation 6 was often found to be 2.65. and the suggested working value is 3.0 (g methanol)/(g  $\text{NO}_3^- - \text{N}$  removed); in spite of the coefficient 0.87 in equation 6, values as large as 1.1-1.2 have been found as well [3].

This process of biological denitrification depends on environmental conditions such as oxygen content, temperature and pH [16]. Alkalinity is produced in denitrification reactions and the pH is generally elevated, instead of being depressed as in nitrification reactions. In contrast to nitrifying organisms, there has been less concern about pH influences on denitrification rates. No significant effect of the denitrification rate has been reported for pH between 7.0 and 8.0 [34].

### 2.1 Biological Denitrification System

Denitrification of a well nitrified effluent can be achieved by providing a zone in which the effluent is brought into contact with a large biomass containing heterotrophic micro-organisms, in an anoxic environment; and in the presence of a suitable exogenous carbon source. Complete denitrification appears feasible with the use of methanol or some equivalent carbon source, in either attached growth (fixed film) or suspended growth system.

## III. FLUIDIZED BED BIOFILM REACTOR

The FBBR, the attached growth type of reactor (system), is a recent process innovation in wastewater treatment, which utilizes small, fluidized media for cell immobilization and retention [37, 54]. Main application of the FBBR is in the field of biological treatment of wastewater. Aerobic as well as anaerobic FBBRs have received increasing attention for being an effective technology to treat water and wastewater [55, 51, 50, 35, 26, 38, 18, 52, 4, 42, 8]. Its most important features are - the fixation of microorganisms on the surface of small-sized particles, leading to high content of active microorganisms and large surface area available for reaction with the liquid; the high flow rate (low residence time) which can be achieved, leading to high degree of mixing (decreased external mass transfer resistances) and to large reduction in size of the plant; and the removal of risk of clogging [58].

The basic concept of the process consists of passing wastewater up through a packed bed of particles at a velocity sufficient to impart motion to or fluidize the particles. As the flow of the wastewater passes upward through the biological bed, very dense concentrations of organisms growing on the surface of the bed particles consume the biodegradable waste contaminants in the liquid. Figure 1 is a schematic of the basic unit of the process, showing the entire FBBR with the wastewater flowing upwards through the bed, fluidizing the particles in the liquid. Above the bed is a clear water zone wherein the particles separate from the liquid.

From a biological point of view, the attached microorganisms on the suspended particles may include any of the aerobic, facultative, or anaerobic organisms typically found in trickling filters and suspended growth type of treatment systems. The predominating species would depend entirely on the waste contaminant being consumed and whether an aerobic or anaerobic environment is maintained, as well as other factors that affect biological growth.

Fluidized beds combine the best features of activated sludge and trickling filtration into one process. Offering a fixed film and a large surface area, these systems offer the stability and ease of operation of the trickling filter as well as the greater operating efficiency of the activated sludge process. More importantly, treatment is accomplished in significantly less space and time, which can be translated into less cost than conventional treatment. The primary reason for this savings in space, cost, and treatment time is that the measured concentration of active biomass in the fluidized bed system reported is in the order of 8,000 mg  $\text{l}^{-1}$  – 40,000 mg  $\text{l}^{-1}$ , which is usually greater than conventional treatment systems such as the complete-mix activated sludge process in which the MLSS (Mixed Liquor Suspended Solids) ranges between 3,000 mg  $\text{l}^{-1}$  – 6,000 mg  $\text{l}^{-1}$  or the pure oxygen systems where the MLSS ranges from 6,000 mg  $\text{l}^{-1}$  – 8,000 mg  $\text{l}^{-1}$  [57, 42]. The reason for this is that the available surface area per unit of volume of reactor for biological growth in the fluidized bed system is much greater than either trickling filters or rotating biological contactors. This area is estimated to be about 3,290  $\text{m}^2 \text{m}^{-3}$ , which is far greater than that of trickling filter (82.25  $\text{m}^2 \text{m}^{-3}$ ) or of the rotating disc (164.5  $\text{m}^2 \text{m}^{-3}$ ). Fluidized beds with attached microbial growth on carrier particles have been found to be extremely efficient for biodegradation of liquid waste. Both aerobic as well as anaerobic degradation can effectively be obtained. In capital cost including land, tanks, pumps, clarifiers and solid separators, works out at 1/4<sup>th</sup> the cost of that for the conventional suspended growth process. The operating cost is slightly lower for the same capacity

[32]. In anaerobic FBBR, biomass concentrations exceeding 30,000 mg l<sup>-1</sup> have been reported and organic removal efficiencies of 80 percent were achieved at loadings of 4 kg COD m<sup>-3</sup> d<sup>-1</sup> on dilute wastewaters [10]. The advantages of FBBR can be summarized as follows. First, higher biomass concentration can be maintained in the process; hence the system has more metabolic activities, compared to that of suspended growth system. Second, the presence of longer food chains in biofilm with abundant microbial species and can provide stability, long retention time of microbes and much less surplus sludge. Third, the coexistence of aerobic and anoxic zones within the biomass film could provide an opportunity for simultaneous nitrification and denitrification to occur. Fourth, the biofilm processes are less sensitive to the toxic condition and other adverse operational conditions, thus making them easy to operate and maintain. Finally, problems caused by poor settling of sludge and sludge bulking would not be encountered during operation [41].

## IV. MATERIALS AND METHODS

### 4.1 Fluidized Bed Biofilm Reactor (Denitrifying Unit)

The experimental setup used for this study is shown in Figure 1. Its main part is the 1.22 l reactor made of Plexiglas tube (0.036 m diameter, 1.20 m long), which is fixed to a steel stand. It is filled with uniform bone china fine granules as a biofilm carrier to a settled depth of 0.30 m. At the bottom, a small closed influent tank of 6 l capacity is provided to which pump is fitted which supplies the influent to the reactor. At the top of the reactor an outlet pipe (tube) is joined which collects the effluent from the reactor and discharge again into influent tank. At the inlet of the reactor, a regulator cock is provided to regulate the flow as well as fluidization of media in the reactor. Fine screens are provided at both the ends (bottom and top end) of the reactor to avoid escape of media from the reactor and also to distribute the flow uniformly in the reactor.

pH, temperature, alkalinity, COD and NO<sub>3</sub><sup>-</sup> N concentrations were systematically recorded at the end of each run.

### 4.2 Biofilm Carrier Media


Various materials have been tried by researchers as biofilm carrier media. e.g. sand, glass beads, activated carbon, cement ball [18], plastic, etc. In this study bone china fine granules were used as biofilm carrier media. It is prepared by crushing and sieving waste bone china (crookery) material. The characteristics found after performing particle size distribution of bone china fine granules were – Effective size (D<sub>10</sub>) 0.129 mm, Coefficient of Uniformity Cu (D<sub>60</sub>/D<sub>10</sub>) 3.648, Coefficient of curvature or gradation Cc ((D<sub>30</sub>)<sup>2</sup>/(D<sub>60</sub>\*D<sub>10</sub>)) 0.019, and Specific gravity 2.26.

### 4.3 Feed

A synthetic medium (synthetic wastewater) was prepared using deionized water in addition to the other chemicals. Potassium nitrate (KNO<sub>3</sub>) was added as the nitrogen source at different varying concentrations of NO<sub>3</sub><sup>-</sup>-N in mg l<sup>-1</sup>. PO<sub>4</sub><sup>3-</sup> (as Na<sub>2</sub>HPO<sub>4</sub>.12H<sub>2</sub>O and KH<sub>2</sub>PO<sub>4</sub>) both as P source and medium buffering agent. Trace mineral constituents essential to the bacterial growth added per liter were : 0.85 mg FeSO<sub>4</sub>.7H<sub>2</sub>O, 0.25 mg Na<sub>2</sub>MoO<sub>4</sub>.2H<sub>2</sub>O, 0.157 mg MnSO<sub>4</sub>.7H<sub>2</sub>O and 33 mg NaHCO<sub>3</sub>. Sodium sulfite and Cobalt chloride were added at concentrations of 20 and 0.55 mg l<sup>-1</sup> respectively, to reduce the oxygen concentration to below 0.5 mg l<sup>-1</sup> to ensure anoxic conditions in the reactors [42]. The Methanol was used as carbon source. The concentration of NO<sub>3</sub><sup>-</sup> - N and methanol in the medium was varied at different stages of the study to maintain (methanol/NO<sub>3</sub><sup>-</sup>-N) ratio.

### 4.4 Operation of a Fluidized Bed Biofilm Reactor

Figure 1 shows schematic diagram of the FBBR which was operated daily for denitrification, nearly for a year. The reactor was inoculated with domestic wastewater and run by feeding synthetic medium for 15 days. After getting proper results, the reactor was operated for 75 days to find out optimum methanol/NO<sub>3</sub><sup>-</sup> - N ratio. For this, reactor was run for 15 days each for each methanol/NO<sub>3</sub><sup>-</sup> - N ratio of 2.25, 2.50, 2.75, 3.00 and 3.25. Average NO<sub>3</sub><sup>-</sup> - N removal efficiency obtained was 67.95%, 78.96%, 84.55%, 89.88% and 86.63% for methanol/NO<sub>3</sub><sup>-</sup> - N ratios 2.25, 2.50, 2.75, 3.00 and 3.25 respectively. Hence, the ratio of 3.00 was finalized for the present study.

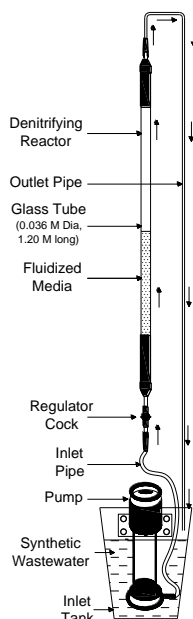

**Figure 1. Experimental Setup of Fluidized Bed Biofilm Reactor.**

For Experimental work, by maintaining constant methanol/ $\text{NO}_3^-$ -N ratio as 3.00, the synthetic wastewater samples were prepared for varying concentration of  $\text{NO}_3^-$ -N of 10.00  $\text{mg l}^{-1}$ , 20.00  $\text{mg l}^{-1}$ , 30.00  $\text{mg l}^{-1}$ , 40.00  $\text{mg l}^{-1}$ , 50.00  $\text{mg l}^{-1}$ , 60.00  $\text{mg l}^{-1}$ , 70.00  $\text{mg l}^{-1}$ , 80.00  $\text{mg l}^{-1}$ , 90.00  $\text{mg l}^{-1}$  and 100.00  $\text{mg l}^{-1}$ . For these each concentrations of  $\text{NO}_3^-$ -N, the reactor was run for 10 days and various characteristics of influent and effluent were measured at the end of each run (i.e. hydraulic retention time (HRT) of 5 minutes, 10 minutes, 15 minutes, 20 minutes, 25 minutes, 30 minutes). The characteristics measured were temperature, pH, alkalinity, COD and  $\text{NO}_3^-$ -N.

#### 4.5 Analytical Methods

Samples were collected from the FBBR at regular intervals. These samples were tested for various characteristics. pH was measured by digital pH Meter. Alkalinity was determined by titration method according to APHA [1]. COD was measured by reflux method according to APHA [1].  $\text{NO}_3^-$ -N was measured by UV-Spectrophotometer (Schimadzu make, Model – UV 1650).

## V. RESULTS AND DISCUSSION





The experimental denitrification reactor was operated for 10 different concentrations and readings were recorded at HRT of 5 minutes, 10 minutes, 15 minutes, 20 minutes, 25 minutes, and 30 minutes. The  $\text{NO}_3^-$ -N removal was determined on the basis of the results of analysis of medium entering and leaving the reactor for methanol/  $\text{NO}_3^-$ -N ratio of 3.00. Average  $\text{NO}_3^-$ -N removal Efficiency was found to be 60.60%, 86.86%, 88.77%, 90.72%, 91.75% and 92.26% for HRT of 5 minutes, 10 minutes, 15 minutes, 20 minutes, 25 minutes, and 30 minutes respectively. The results are shown graphically in Fig. 2, Fig. 3, Fig. 4, Fig. 5, Fig. 6, and Fig. 7.

In this study, it was found that,  $\text{NO}_3^-$ -N removal efficiency was in the increasing order for the increasing concentration of  $\text{NO}_3^-$ -N up to 70  $\text{mg l}^{-1}$ , after this trend was declining.  $\text{NO}_3^-$ -N removal efficiency for hydraulic retention time of 30 minutes for  $\text{NO}_3^-$ -N concentration of 10  $\text{mg l}^{-1}$ , 20  $\text{mg l}^{-1}$ , 30  $\text{mg l}^{-1}$ , 40  $\text{mg l}^{-1}$ , 50  $\text{mg l}^{-1}$ , 60  $\text{mg l}^{-1}$  and 70  $\text{mg l}^{-1}$  was 91.52%, 92.17%, 92.10%, 92.45%, 92.72%, 92.64% and 93.71%. And  $\text{NO}_3^-$ -N removal efficiency after 30 minutes for  $\text{NO}_3^-$ -N concentration of 80  $\text{mg l}^{-1}$ , 90  $\text{mg l}^{-1}$  and 100  $\text{mg l}^{-1}$  was 92.19%, 91.60%, 91.51%. Fig. 8 shows graphical representation of  $\text{NO}_3^-$ -N removal % for different HRTs. From the Figure, it was observed that, as the concentration of  $\text{NO}_3^-$ -N increases in the wastewater sample (i.e. from 10.00  $\text{mg l}^{-1}$  to 70.00  $\text{mg l}^{-1}$ ) there was a gradual increase in  $\text{NO}_3^-$ -N removal. But after this there was a slight decrease in  $\text{NO}_3^-$ -N removal rate. This might be due to less concentration of available  $\text{NO}_3^-$ -N present in the wastewater.

Fig. 9 shows the graphical representation of  $\text{NO}_3^-$ -N removal % for wastewater containing varying concentrations of  $\text{NO}_3^-$ -N at different HRTs. From the readings and figures, it was observed that most of the  $\text{NO}_3^-$ -N was removed at HRT of 10 minutes. There is a very little difference between  $\text{NO}_3^-$ -N removal % at HRT of 10 and 30 minutes. Thus HRT of 10 minutes can be considered as optimum condition.



In the present study, the nitrogen loading rates varied from  $0.48 \text{ kg N m}^{-3} \text{ d}^{-1}$  to  $28.80 \text{ kg N m}^{-3} \text{ d}^{-1}$ . For these nitrogen loading rates, denitrification rates observed vary from  $0.44 \text{ kg N m}^{-3} \text{ d}^{-1}$  to  $17.26 \text{ kg N m}^{-3} \text{ d}^{-1}$ . But optimum (at maximum  $\text{NO}_3^-$ -N removal efficiency), nitrogen loading rate and denitrification rate observed were  $10.08 \text{ kg N m}^{-3} \text{ d}^{-1}$  and  $8.88 \text{ kg N m}^{-3} \text{ d}^{-1}$  respectively. Rezaee et al. [44], in their study to investigate technical feasibility of biological nitrate removal in a packed bed reactor using microbial cellulose as biopolymer carrier, got denitrification rate of  $4.7 \text{ kg NO}_3^- \text{ N m}^{-3} \text{ d}^{-1}$  for loading rate of  $5.64 \text{ kg NO}_3^- \text{ N m}^{-3} \text{ d}^{-1}$ . The biofilm reactors give high nitrate removal rate from  $3.1 - 4.4 \text{ kg NO}_3^- \text{ N m}^{-3} \text{ d}^{-1}$  to  $10 - 12 \text{ kg NO}_3^- \text{ N m}^{-3} \text{ d}^{-1}$  [25]. Rabah [42], presented the results of his study in comparison with the other studies in which fluidized bed reactors were reportedly used with methanol as the carbon source (Table 1). Results found by Rabah [42] were found to be in agreement with the results obtained in this research.

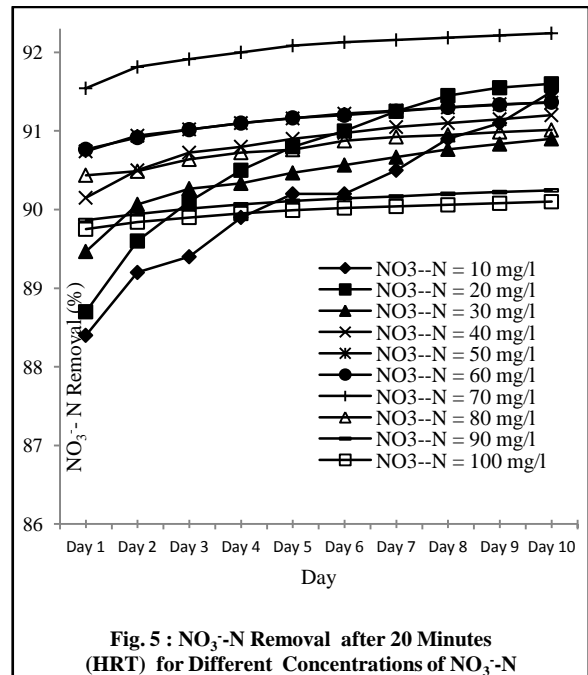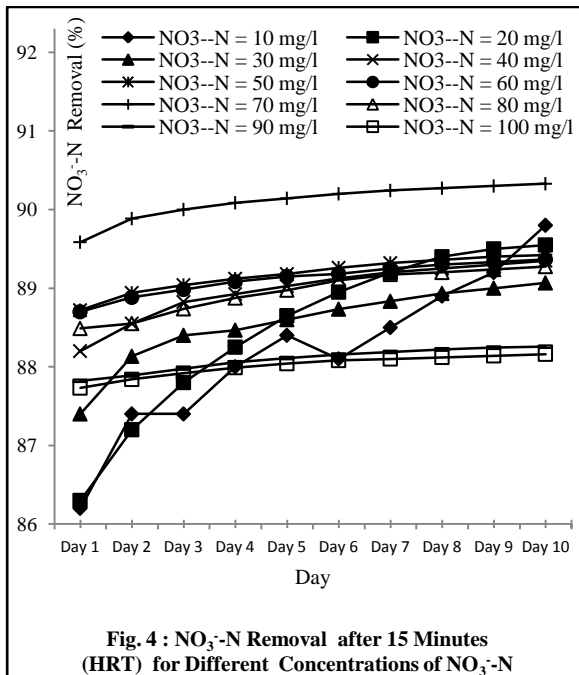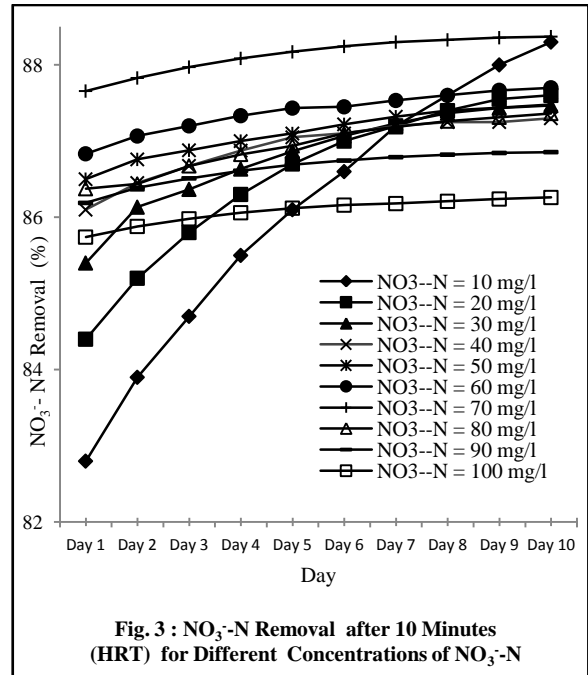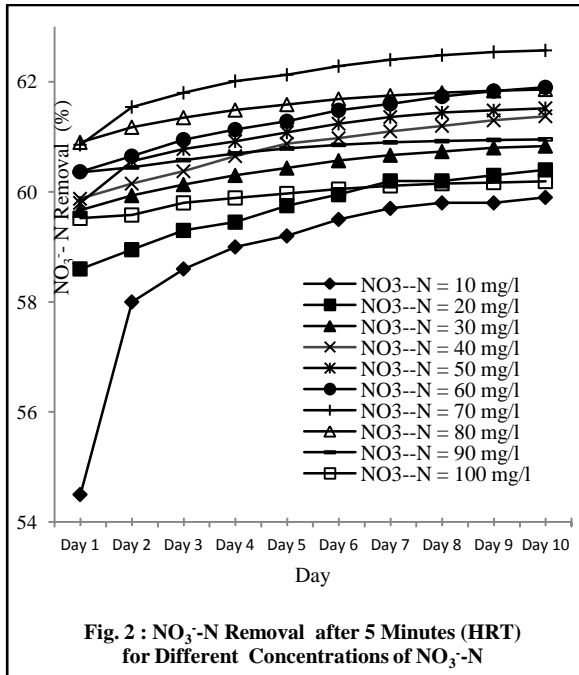

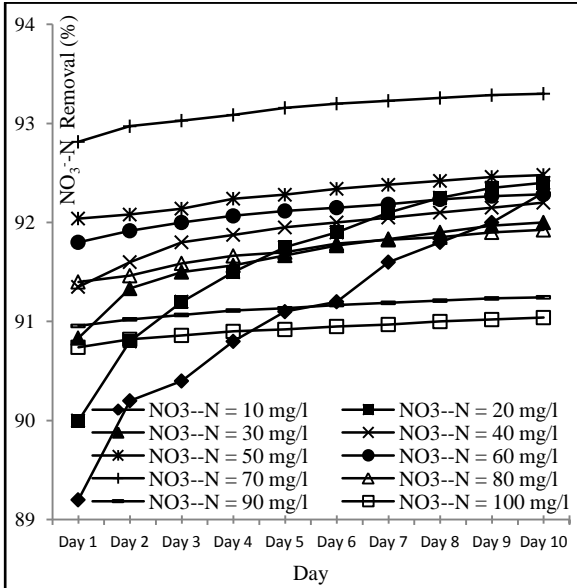


Fig. 6 : NO<sub>3</sub><sup>-</sup>-N Removal after 25 Minutes (HRT) for Different Concentrations of NO<sub>3</sub><sup>-</sup>-N

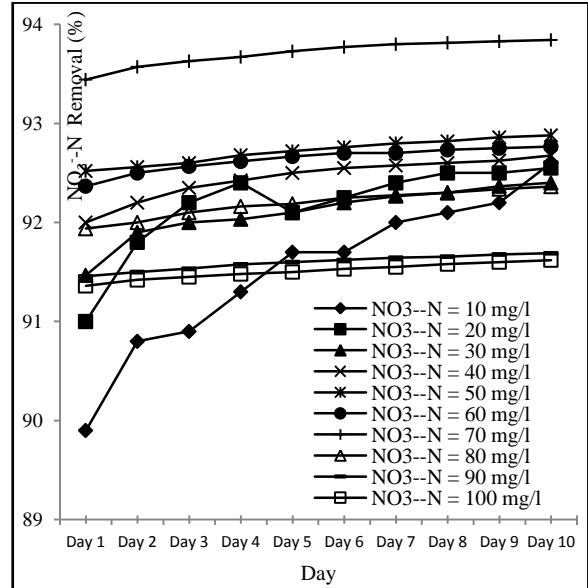


Fig. 7 : NO<sub>3</sub><sup>-</sup>-N Removal after 30 Minutes (HRT) for Different Concentrations of NO<sub>3</sub><sup>-</sup>-N

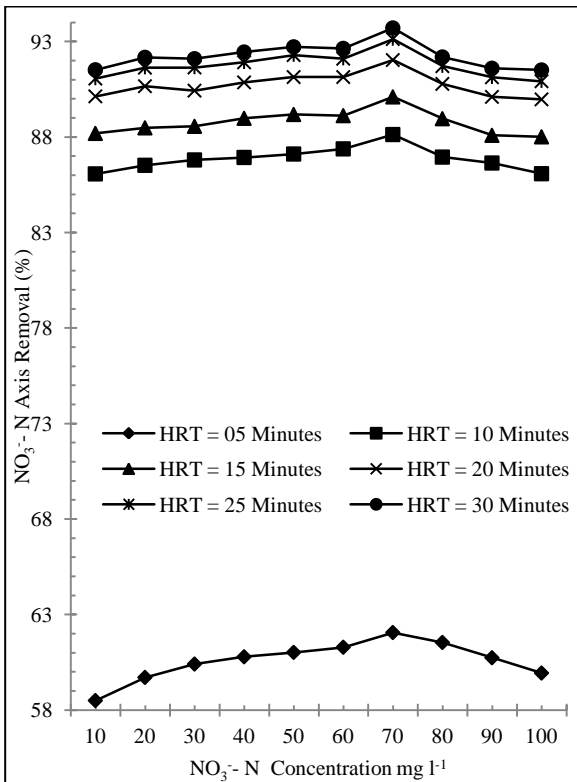


Fig. 8 : NO<sub>3</sub><sup>-</sup>-N Removal (%) for Different HRTs for Different Concentrations of NO<sub>3</sub><sup>-</sup>-N

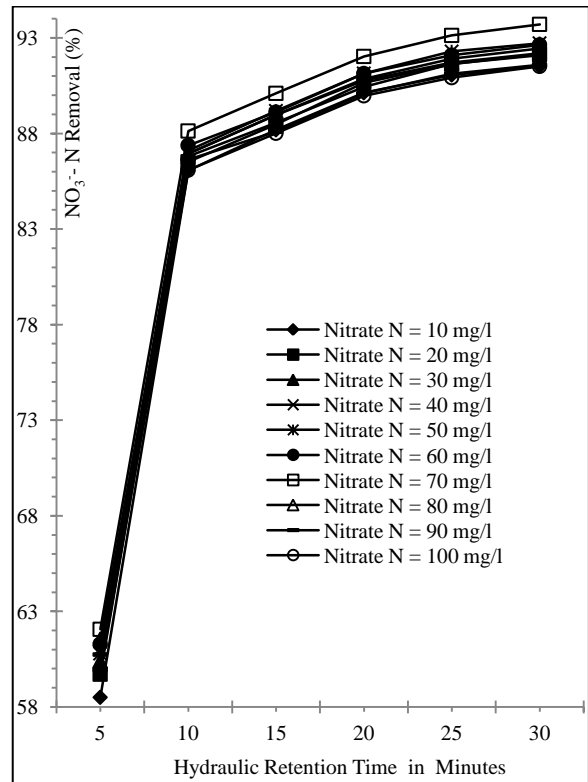


Fig. 9 : NO<sub>3</sub><sup>-</sup>-N Removal for Different Concentrations of NO<sub>3</sub><sup>-</sup>-N at Different HRTs

**Table 1: Comparison of some studies on denitrification using fluidized bed reactors**

| Form of Nitrogen               | Temperature (°C) | Concentration of Nitrogen (mg l <sup>-1</sup> ) | Denitrification Rate (kg N m <sup>-3</sup> d <sup>-1</sup> ) | References                        |
|--------------------------------|------------------|---|--|-----------------------------------|
| NO <sub>3</sub> <sup>-</sup> N | 18-23            | 5 – 100   | 5.4 – 20.70  | Jeris and Owens (1975).           |
| NO <sub>3</sub> <sup>-</sup> N | -                | 6.6 – 30  | 0.69 – 3.28  | Hermanwicz and Cheng (1990).      |
| NO <sub>3</sub> <sup>-</sup> N | 30               | 15 – 300  | 3.23 – 18.70   | Hirata and Meutia (1996).         |
| NO <sub>3</sub> <sup>-</sup> N | 20               | 20  | 3.5  | MacDonald (1990).                 |
| NO <sub>3</sub> <sup>-</sup> N | -                | 676 – 1500                                      | 11.8 – 17.7  | Chen et al (1996).                |
| NO <sub>3</sub> <sup>-</sup> N | 23               | 1000  | 12   | Rabah Fahid K. J., et al, (2004). |
| NO <sub>3</sub> <sup>-</sup> N | 24.5 – 40.5      | 10 – 100  | 0.44 – 17.26<br>(Optimum 8.88)                               | This Study                        |

Courtesy: Rabah [42].

Heterotrophic denitrification causes a release of hydroxyl ions and raises alkalinity. Each mg of nitrate-N reduced to N<sub>2</sub> causes an alkalinity increase of 3.57 mg CaCO<sub>3</sub> [45]. In this study, average g of Alkali produced per g of NO<sub>3</sub><sup>-</sup>-N removed was found to be 3.60 which is in agreement with the value found in literature. As alkalinity is produced, there is a rise in pH. pH of the influent was in the range of 6.56 – 7.15 and that of effluent observed was in the range of 6.76 – 8.06.

The denitrification intensity depends on carbon availability. The carbon to nitrogen ratio in the biological reactor influent should be high enough to denitrify all nitrates arisen in the nitrification process. Komorowska-Kaufman [24], mentioned in his paper, many researchers' work revealed the g ΔCOD/g ΔN ratio as 3.5 – 4.5. In the present study, based on all the results, average g of COD consumed per g of NO<sub>3</sub><sup>-</sup>-N removed is found to be 3.70. This is in confirmation with the results obtained by many researchers.

## VI. CONCLUSION

The results of the investigation, demonstrated that the trend of the removal of NO<sub>3</sub><sup>-</sup>-N is quite high up to hydraulic retention time of 10 minutes. An average removal rate at this HRT observed was 88.13%. Also on the initial NO<sub>3</sub><sup>-</sup>-N concentration basis, it was observed that for initial concentrations upto 70 mg l<sup>-1</sup>, the NO<sub>3</sub><sup>-</sup>-N removal rate was in increasing order but for higher concentrations, the trend was slightly declining. The efficiency can be improved by using special culture of denitrifying microorganisms in the FBBR.

The result of this study demonstrated conclusively that FBBR with bone china fine granules as a biofilm carrier media can be used with great advantages for denitrification.

This study provides the justification for the recommendation of FBBR for denitrification by many researchers.

## VII. ACKNOWLEDGEMENT

We are grateful to Principal, Government College of Engineering, Amravati and Incharges of Environmental Engineering Laboratory at Government College of Engineering, Amravati Prof. Mokadam A. M., Prof. Gulhane M. L. and Prof. Rai R. K. for giving permission to carry out laboratory work in their Institute and their guidance and timely help. We are also thankful to Prof. D. N. Shingade, Principal, Government Polytechnic, Amravati, for giving permission to carry out the present study.

**S. P. Burghate** received M. E. (Environmental Engineering) from Government College of Engineering, Amravati, Maharashtra, India in 1992. He is Lecturer in the Department of Civil Engineering, at Government Polytechnic, Amravati, Maharashtra, India. His research interests include treatment of water and wastewater, solid waste management. He has published 5 papers in National and International journals. He has also presented 6 research articles in national and international conferences. He is a Life Member of professional bodies like, IE (India), ISTE (India), and IWWA.

**Dr. N. W. Ingole** is a Professor and Head in the Department of Civil Engineering, Prof. Ram Meghe Institute of Technology and Research, Badnera, Amravati, Maharashtra, India. He has more than 24 years of experience in teaching and research. His current area of research includes treatment of water and wastewater, solid waste management, Quality Engineering, Neural Networks, Optimization and Simulation. He has published more than 63 papers in refereed National and International journals of repute. He has also presented more than 10 research articles in national and international conferences. He has written a book titled "Environmental Chemistry and Pollution Control". He is life member of National and International Professional Societies, Fellow of Institution of Engineers (India). He is recipient of many National and International awards. He has also got "Promising Engineering Teacher in Engineering Colleges Award". He is currently dealing with few projects sponsored by government of India.



REFERENCES

- [1] APHA, "Standard Methods for the Examination of Water and Wastewater", Washington, DC, 21<sup>st</sup> (Centennial) Edition, 2005.
- [2] Aivasidis, A., Melidis P. and Georgiou D., "Continuous Denitrification by External Electron-donor Supply Utilizing an Algorithm-based Software Controller", *Biochemical Engineering Journal*, **Vol. 25**, pp 179-186, 2005.
- [3] Barnes D. and Bliss P. J., "Biological Control of Nitrogen in Wastewater Treatment", *E. and F. N. Spon*, USA, ISBN 0419123504, pp 145, **1983**.
- [4] Beyenal Haluk, and Tanyolac Abdurrahman, 1998, "The Effects of Biofilm Characteristics on the External Mass Transfer Coefficient in a Differential Fluidized Bed Biofilm Reactor", *Biochemical Engineering Journal*, **Vol. 1**, pp 53-61, 1998.
- [5] Bharadwaj Anil, Garg Sunil, Sondhi S. K. and Taneja D. S., 2012, "Nitrate Contamination of Shallow Aquifer Groundwater in the Central Districts of Punjab, India", *Journal of Environmental Science and Engineering*, **Vol. 54**, No. 1, pp 90-97, 2012.
- [6] Breisha Gaber Z. and Winter Josef, 2010, "Bio-removal of Nitrogen from Wastewaters – A Review", *Journal of American Science*, **Vol. 6**, No. 12, pp 508-528, 2010.
- [7] Brindha K., Rajesh R., Murugan R. and Elango L, 2012, "Nitrate Pollution in Groundwater in Some Rural Areas of Nalgonda District, Andhra Pradesh, India", *Journal of Environmental Science and Engineering*, **Vol. 54**, No. 1, pp 64-70, 2012.
- [8] Chowdhury Nabin, Zhu Jesse and Nakhla George, 2010, "Effect of Dynamic Loading on Biological Nutrient Removal in a Pilot-Scale Liquid-Solid Circulating Fluidized Bed Bioreactor", *Journal of Environmental Engineering*, ASCE, **Vol. 136**, No. 9, pp 906-913, 2010.
- [9] Contreras Edgardo Martin, Ruiz Fabricio and Bertola Nora Cristina, 2008, "Kinetic Modelling of Inhibition of Ammonia Oxidation by Nitrite under Low Dissolved Oxygen Conditions", *Journal of Environmental Engineering*, ASCE, **Vol. 134**, No. 3, pp 184-190, 2008.
- [10] Eckenfelder W. Wesley, Jr., "Industrial Water Pollution Control," Third Edition, *McGraw Hill Book Company*, Singapore, pp 395-396, **2000**.
- [11] Elefsiniotis P. and Li D., 2006, "The Effect of Temperature and Carbon Source on Denitrification using Volatile Fatty Acids", *Biochemical Engineering Journal*, **Vol. 28**, pp 148-155, 2006.
- [12] Foglar Lucija, Briski Felicita, Sipos Laszlo, Vukovic Marija, 2005, "High Nitrate Removal from Synthetic Wastewater with the Mixed Bacterial Culture", *Journal of Bioresource Technology*, **Vol. 96**, pp 879-888, 2005.
- [13] Garwau Sugamadiya D., Saygaonkar Kavita S., Garway Dattatraya G. and Pandya Girish H., 2009, "Investigation of Nitrate Content in Ground and Surface Waters in Urban and Rural Areas", *Journal of Indian Water Works Association*, **Vol. XXXXI**, No. 3, pp 226-236, 2009.
- [14] Gomez M. A., Gonzalez-Lopez J. and Hontoria-Garcia E., 2000, "Influence of Carbon source on Nitrate Removal of Contaminated Groundwater in a Denitrifying Submerged Filter", *Journal of Hazardous Materials*, **Vol. B80**, pp 69-80, 2000.
- [15] Grabinska-Loniewska A., Slomczynski T. and Kanska Z., 1985, "Denitrification Studies with Glycerol as a Carbon Source", *Journal of Water Resources*, **Vol. 19**, No. 12, pp 1471-1477, 1985.
- [16] Heinen Marius, "Simplified Denitrification Models : Overview and Properties", *Journal of Geoderma*, **Vol. 133**, pp 444-463, 2006.
- [17] Hibiya Kazuaki, Terada Akihiko, Tsuneda Satoshi and Hirata Akira, 2003, "Simultaneous Nitrification and Denitrification by Controlling Vertical and Horizontal Microenvironment in a Membrane-aerated Biofilm Reactor", *Journal of Biotechnology*, **Vol. 100**, pp 23-32, 2003.
- [18] Hirata A. and Meutia A. A., et al., "Denitrification of a Nitrite in a Two Phase Fluidized Bed Bioreactor", *Journal of Water Science Technology*, **Vol. 34**, No. 1-2, pp 339-346, 1996.
- [19] Joshi Anita and Seth Gita, "Nitrite and Fluoride Contamination in Ground Water of Sambhar Lake City and Its Adjoining Area Jaipur District (Raj), India", *Journal of Indian Water Works Association*, **Vol. XXXXI**, No. 4, pp 255-259, 2009.
- [20] Joshi V. A., Vaidya S. D., Lanjewar K. Y. and Kelkar P. S., 2009, "Water Quality Problems in Ground Water Sources of Yavatmal District , Maharashtra, India – A Case Study", *Journal of Indian Water Works Association*, **Vol. XXXXI**, No. 2, pp 144-151, 2009.
- [21] Killingstad Marc W., Widdowson Mark A. and Smith Richard L., 2002, "Modeling Enhanced In Situ Denitrification in Groundwater", *Journal of Environmental Engineering Division*, ASCE, **Vol. 128**, No. 6, pp 491-504, 2002.
- [22] Kim Joong Kyun, Park Kyoung Joo, Cho Kyoung Sook, Nam Soo-Wan, Park Tae-Joo and Bajpai Rakesh, 2005, "Aerobic Nitrification – Denitrification by Heterotrophic *Bacillus* Strains", *Journal of Bioresource Technology*, **Vol. 96**, pp 1897-1906, 2005.
- [23] Klas Sivan, Mozes Noam and Lahav Ori, "Development of a Single Sludge Denitrification Method for Nitrate Removal from RAS Effluents : Lab Scale Results vs. Model Prediction", *Journal Aquaculture*, **Vol. 259**, pp 342-353, 2006.
- [24] Komorowska-Kaufman Malgorzata, Majcherek Hanna and Klaczynski Eugeniusz, "Factors affecting the Biological Nitrogen Removal from Wastewater", *Journal of Process Biochemistry*, **Vol. 41**, pp 1015-1021, 2006.
- [25] Lazarova L., Capdeville B. and Nikolov L., "Influence of Seeding Conditions on Nitrite Accumulation in a Denitrifying Fluidized Bed Reactor", *Journal of Water Resources*, **Vol. 28**, No. 5, pp 1189-1197, 1994.
- [26] Lazarova V. and Manem J., "Advances in Biofilm Aerobic Reactors Ensuring Effective Biofilm Activity Control," *Water Science and Technology*, **Vol. 29(10/11)**, pp 319-327, 1994.
- [27] Lee Han-Woong, Lee Soo-Youn, Lee Jin-Woo, Park Jong-Bok, Choi Eui-So and Park Yong Keun, 2002, "Molecular Characterization of Microbial Community in Nitrate-removing Activated Sludge", *Journal of Microbiology Ecology*, **Vol. 41**, pp 85-84, 2002.
- [28] Lee Seungmoon, Maken Sanjeev, Jang Jung-Hwa, Park Kwinam and Park Jin-Won, 2006, "Development of Physicochemical Nitrogen Removal Process for High Strength Industrial Wastewater", *Journal of Water Research*, **Vol. 40**, pp 975-980, 2006.
- [29] Lucas A. De, Rodriguez L., Villasenor J. and Fernandez F. J., "Denitrification Potential of Industrial Wastewaters", *Journal of Water Research*, **Vol. 39**, pp 3715-3726, 2005.
- [30] Magarde Vandana, Iqbal S. A. and Pani Subrata , "Assessment of Water Quality of Upper Lake of Bhopal, Madhya Pradesh", *Journal of Indian Association for Environmental Management*, **Vol. 36**, No. 3, pp 178-182, 2009.
- [31] Magram Saleh Faraj, "Drinking Water Denitrification in a Packed Bed Anoxic Reactor : Effect of Carbon Source and Reactor Depth", *Journal of Applied Sciences*, **Vol. 10**, No. 7, pp 558-563, 2010.
- [32] Mahajan S. P., "Pollution Control in Process Industries," Fifteenth Edition, *McGraw Hill Publishing Company Limited, New Delhi*, pp 75-76, **2002**.
- [33] Mateju Vit, Cizinska Simona, Krejci Jakub and Janoch Tomas, "Biological Water Denitrification – A Review," *Journal of Enzyme Microbiology Technology*, **Vol. 14**, pp 170-183, 1992.

- [34] Metcalf & Eddy, Inc., "Wastewater Engineering: Treatment and Reuse," Fourth Edition, *Tata McGraw Hill Publishing Company Limited, New Delhi*, pp 1819, 2003.
- [35] Mishra P. N. and Sutton P. M., "Biological Fluidized Beds for Water and Wastewater Treatment : A State – of - the - Art Review," *Biodeterioration and Biodegradation*, H. W. Rossmore, eds., Elsevier, New York, pp 340-357, 1990.
- [36] Mora F. Rodriguez, Giner G. Ferrara de, Andara A. Rodriguez and Esteban J. Lomas, "Effect of Organic Carbon Shock Loading on Endogenous Denitrification in Sequential Batch Reactors", *Journal of Bioresource Technology*, **Vol. 88**, pp 215-219, 2003.
- [37] Mulcah Leo T. and Shieh W.K., "Fluidization and Reactor Biomass Characteristics of the Denitrification Fluidized Bed Biofilm Reactor", *Journal of Water Resources*, **Vol. 21**, No. 4, pp 451-458, 1987.
- [38] Nicolella Cristiano, Felice Renzo Di and Rovatti Mauro, "An Experimental Model of Biofilm Detachment in Liquid Fluidized Bed Biological Reactors", *Journal of Biotechnology and Bioengineering*, ASCE, **Vol. 51**, pp 713-719, 1996.
- [39] Nyamapfene K. W. and Mtetwa E. G., "Biological Denitrification of a Highly Nitrogenous Industrial Effluent : A Case Study in Zimbabwe", *Journal of Environmental Pollution*, **Vol. 44**, pp 119-126, 1987.
- [40] Ozha D. D., "Nitrate – An Environmental Pollutant in Ground Water of Rajasthan and Its Management for Sustainable Future", *Journal of Indian Water Works Association*, **Vol. XXXXII**, NO. 3, pp 214-217, 2010.
- [41] Ra ChangSix and Lau Anthony., 2010, "Swine Wastewater Treatment Using Submerged Biofilm SBR Process : Enhancement of Performance by Internal Circulation Through Sand Filter", *Journal of Environmental Engineering*, ASCE, **Vol. 136**, No. 6, pp 585-590, 2010.
- [42] Rabah Fahid K. J. and Dahab Mohamed F., "Biofilm and Biomass Characteristics in High Performance Fluidized-Bed Biofilm Reactors", *Journal of Water Research*, **Vol. 38**, pp 4262-4270, 2004.
- [43] Reising A. R., and Schroeder E. D., "Denitrification Incorporating Microporous Membranes", *Journal of Environmental Engineering Division*, ASCE, **Vol. 122**, No. 7, pp 599-604, 1996.
- [44] Rezaee Abbas, Godini Hatam, Naimi Nayara, Masombaigi Hossin, Yazdanbakhsh Ahmadreza, Mosavi Gholemreza and Kazemnejad Anoshi , "High Nitrate Removal in a Packed Bed Bioreactor Using Microbial Cellulose", *Research Journal of Environmental Sciences*, **Vol. 2**, No. 6, pp 424-432, 2008.
- [45] Rijn Jaap van, Tal Yossi and Schreier Harold J., "Denitrification in Recirculating Systems : Theory and Applications ", *Journal of Aquacultural Engineering*, **Vol. 34**, pp 364-376, 2006.
- [46] Rocca Claudio Della, Belgiorno Vincenzo and Meric Sureyya, "An Heterotrophic/Autotrophic Denitrification (HAD) Approach for Nitrate Removal from Drinking Water", *Journal of Process Biochemistry*, **Vol. 41**, pp 1022-1028, 2006.
- [47] Ruiz G., Jeison D., Rubilar O., Ciudad G. and Chamy R., "Nitrification – Denitrification via Nitrite Accumulation for Nitrogen Removal from Wastewaters", *Journal of Bioresource Technology*, **Vol. 97**, pp 330-335, 2006.
- [48] Sage M., Daufin G. and Gesan-Guiziou G., "Denitrification Potential and Rates of Complex Carbon Source from Dairy Effluents in Activated Sludge System", *Journal of Water Research*, **Vol. 40**, pp 2747-2755, 2006.
- [49] Sahli M. A. Menkouchi, Tahaikt M., Achary I., Taky M., Elhanouni F., Hafsi M., Elmghari M. and Elmidaoui, "Technical Optimization of Nitrate Removal for Groundwater by ED using a Pilot Plant", *Journal of Desalination*, **Vol. 189**, pp 200-208, 2006.
- [50] Schugerl K., "Three Phase Biofluidization : Application of three Phase Fluidization in the Biotechnology – a Review," *Chem. Engineering Sci.*, **Vol. 52(21/22)**, pp 3661-3668, 1997.
- [51] Schugerl K., "Biofluidization : Application of the Fluidization Technique in Biotechnology," *Can. Journal Chem. Engineering*, Ottawa, Canada, **Vol. 67(2)**, pp 178-184, 1989.
- [52] Seok Jonghyuk and Komisar Simeon J., "Integrated Modelling of Anaerobic Fluidized Bed Bioreactor for Deicing Waste Treatment. II : Simulation and Experimental Studies", *Journal of Environmental Engineering*, ASCE, **Vol. 129**, No. 2, pp 110-122, 2003.
- [53] Shao Youyuan, Li Wei, Yao Chuang, Qin Guanfeng and Szewczyk Krzysztof W., "Influence of COD/N Ratios on Simultaneous Removal of C and N Compounds in Biological Wastewater Treatment in Sequencing Fed-Batch Reactor and Kinetic Analysis", *Journal of hazardous, Toxic, and Radioactive Waste*, ASCE, **Vol. 15**, No. 1, pp 42-47, 2011.
- [54] Shieh W. K. and Chun T. Li., "Performance and Kinetics of Aerated Fluidized Bed Biofilm Reactor," *Journal of Environmental Engineering Division*, ASCE, **Vol. 115**, No. 1, pp 65-78, 1989.
- [55] Shieh W. K. and Keenan J. D., "Fluidized Bed Biofilm Reactor for Wastewater Treatment," *Adv. in Biochem Engineering*, **Vol. 33**, pp 131-169, 1986.
- [56] Srinu Naik S. and Pydi Setti Y., "Optimization of Parameters for Denitrification of Wastewater using Fluidized Bed Bioreactor by Taguchi Method", *International Journal of Biotechnology Applications*, **Vol. 3**, No. 3, pp 97-101, 2011.
- [57] Stathis T. C., "Fluidized Bed for Biological Wastewater Treatment," *Journal of Environmental Engineering Division*, ASCE, **Vol. 106**, No. EE1, pp 227-241, 1980.
- [58] Traverso Pietro G. and Cecchi Franco, "Encyclopedia of Environmental Control technology – Wastewater Treatment Technology," **Vol. 3**, pp 295-324, 1992.
- [59] Vidal S., Rocha C. and Galvao H., "A Comparison of Organic and Inorganic Carbon Controls over Biological Denitrification in Aquaria", *Journal of Chemosphere*, **Vol. 48**, pp 445-451, 2002.
- [60] Virdis Bernardino, Read Suzanne T., Rabaey Korneel, Rozendal Rene A., Yuan Zhiguo and Keller Jurg, 2011, "Biofilm Stratification during Simultaneous Nitrification and Denitrification (SND) at a biocathode", *Journal of Bioresource Technology*, **Vol. 102**, pp 334-341, 2011.
- [61] Volokita Michal, Belkin Shimshon, Abeliovich Aharon and Soares M. Ines M., "Biological Denitrification of Drinking Water using Newspaper", *Journal of Water Resource*, **Vol. 30**, No. 4, pp 965-971, 1996.
- [62] Wasik Ewa, Bohdziewicz Jolanta and Blaszczyk Mieczyslaw, "Removal of Nitrates from Groundwater by a Hybrid Process of Biological Denitrification and Microfiltration Membrane", *Journal of Process Biochemistry*, **Vol. 37**, pp 57-64, 2001.
- [63] Wu Chang-Yong, Peng Yong-Zhen, Li Xiao-Ling and Wang Shu-Ying., "Effect of Carbon Source on Biological Nitrogen and Phosphorus Removal in an Anaerobic-Anoxic-Oxic (A<sup>2</sup>O) Process", *Journal of Environmental Engineering*, ASCE, **Vol. 136**, No. 11, pp 1248-1254, 2010.
- [64] Xiao L. W., Rodgers M. and Mulqueen J., "Organic Carbon and Nitrogen Removal from a Strong Wastewater using a Denitrifying Suspended Growth Reactor and a Horizontal Flow Biofilm Reactor", *Journal of Bioresource Technology*, **Vol. 98**, pp 739-744, 2007.
- [65] Yang P. Y., Nitisoravut S. and Wu Jy S., "Nitrate Removal using a Mixed Culture Entrapped Microbial Cell Immobilization Process under High Salt Conditions", *Journal of Water Resource*, **Vol. 29**, No. 6, pp 1525-1532, 1995.